




# T SERIES

## T10000 & T12000 Planter Bar

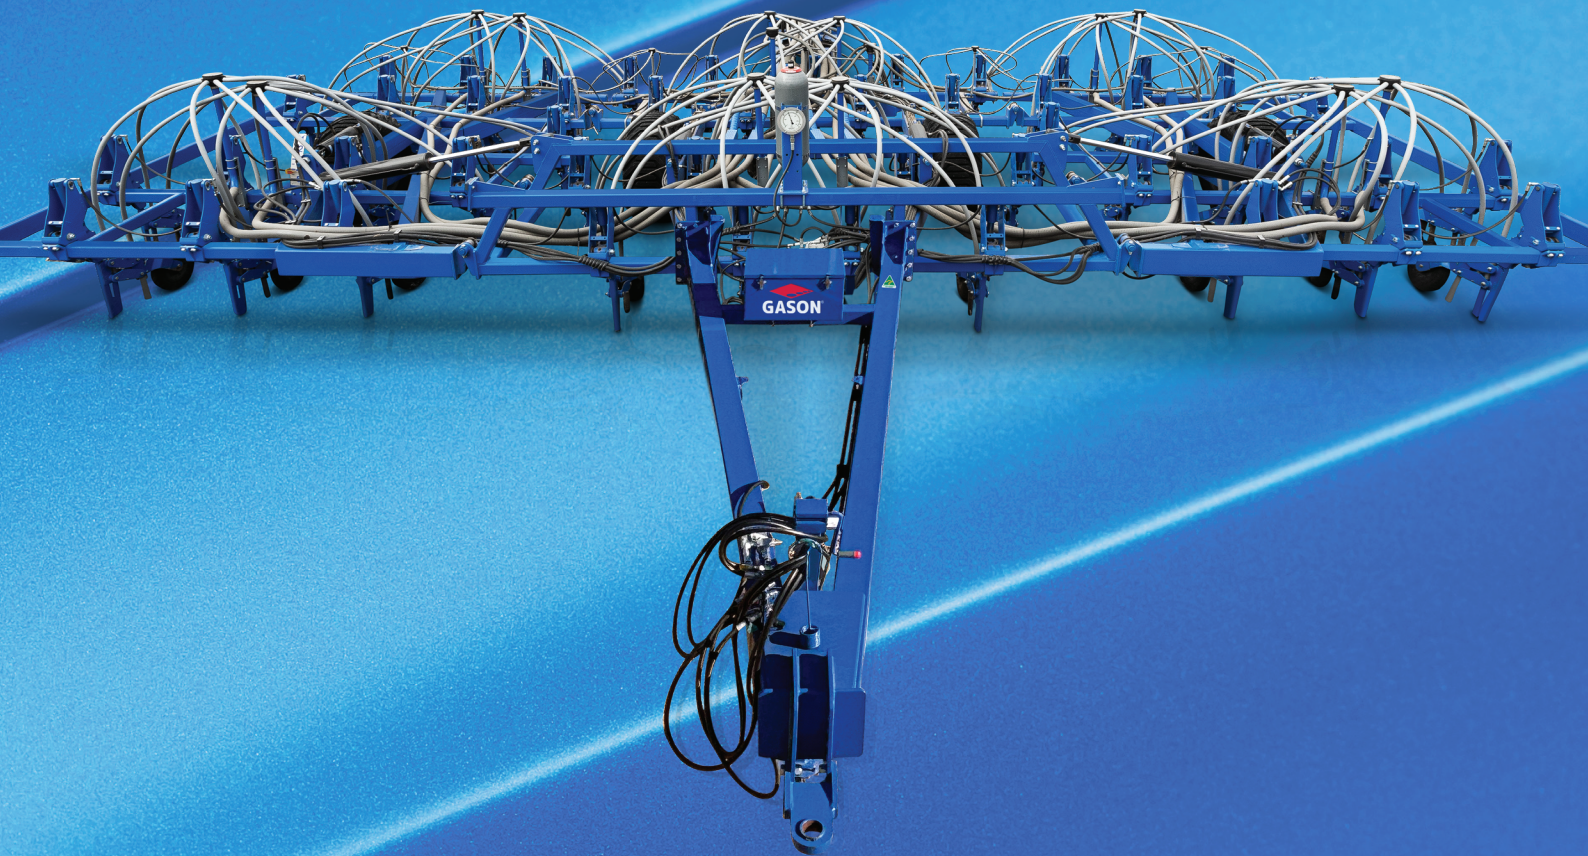

PROUDLY DESIGNED & CRAFTED  
ARARAT, VICTORIA, AUSTRALIA.


[GASON.COM.AU](http://GASON.COM.AU)





# T SERIES

## T10000 & T12000 Planter Bar



The T10000 and T12000 were developed to provide a modern and reliable planter for the Australian broadacre market, while complying with new national legislation for over-dimension agricultural vehicles. Both models fold to under 6.5m transport width.

The clean, simplistic design featuring a single row of 500/50-22.5 high flotation wheels and a rigid pull makes for a strong and manoeuvrable

machine. Frames are fitted with Gason's tried and proven ScariTILL or HydraTILL tine assemblies providing breakout from 300lb to 680lb.

The T Series is ideally coupled with a Gason Air Seeder to provide a complete planting package - compatible with 3m controlled traffic farming practices, and our range of parallelogram/frame mounted press-wheels.

T Series Specifications			
Technical Specifications	T10000		T12000
Overall Length		9.60m	
Overall Unfolded Width	10.20m		12.10m
Frame Depth (front to rear)		4.30m	
Overall Road Transport Width		6.45m	
Overall Road Transport Height	4.05m		5.00m
Road Clearance		250mm	
Max Recommended Working Depth		150mm	
Overall Weight		9.0t **	
<i>** Approximate weight only, varies depending on configuration and attachments.</i>			

Tine Spacing	Number of Tines		Effective Working Width	
	T10000	T12000	T10000	T12000
200mm (8")	50	60	10.0m	12.0m
250mm (10")	40	48	10.0m	12.0m
300mm (12")	34	40	10.2m	12.0m

T Series Specifications	
Frame Configuration	
No. of Toolbar Rows	5
Toolbar Spacing	1.0m typ.
No. of Toolbar Rows	100 x 100 x 9.0mm RHS Grade 450
Toolbar Spacing	250 x 150 x 6.0mm RHS Grade 450
ScariTILL	
Breakout Force	180kg (400lbf) 245kg (540lbf)
Underframe Clearance	760mm to 660mm (30" to 26") in 12.5 mm (½") increments.
Tine Jump	350mm (13.8")
HydraTILL	
Breakout Force Hydraulic	140kg to 310kg (310lbf to 680lbf)
Underframe Clearance	760mm to 660mm (30" to 26") in 12.5 mm (½") increments.
Tine Jump	350mm (13.8")
Other Specifications	
Tyres	500/50-22.5 16PLY Tubeless Flotation Tyre
Wheel Centre Width	3.0m (3m controlled traffic)
Hydraulic Hoses (depth & wing fold)	½" I.D. SAE100R2 hose (non-skive)
Maximum Road Transport Speed	20km/h
Hydraulic Hitch (optional)	Manual operation from tractor

**GASON**<sup>®</sup>  
STRONG.  
LIFELONG.

PLEASE VISIT [GASON.COM.AU](http://GASON.COM.AU)  
TO FIND YOUR NEAREST DEALER